



Founder, Editorial and Publisher
POLISSIA NATIONAL UNIVERSITY

ISSN: 2663-2144

SCIENTIFIC

H O R I Z O N S



НАУКОВІ ГОРИЗОНТИ



Засновник, редакція, видавець
ПОЛІСЬКИЙ НАЦІОНАЛЬНИЙ УНІВЕРСИТЕТ

**Свідоцтво про державну реєстрацію
Серія KB № 24756-14696 ПР від 26.02.2021 р.**

Науковий журнал включено до категорії Б Переліку наукових фахових видань України, в яких можуть публікуватися результати дисертаційних робіт на здобуття наукових ступенів доктора і кандидата ветеринарних, економічних, сільськогосподарських та технічних наук зі спеціальностей – 071, 072, 073, 075, 076, 101, 133, 201, 202, 203, 204, 205, 206, 208, 211 (наказ МОН України № 1643 від 28.12.2019 р., наказ МОН України № 409 від 17.03.2020 р.).

Журнал включено до міжнародних наукометричних баз і каталогів наукових видань: Index Copernicus; Directory of Open Access Journals (DOAJ); Open Academic Journals Index (OAJI); Google Scholar; Crossref; Національна бібліотека України імені В.І. Вернадського, AGRICOLA, CAB Abstracts and Global Health (CABI), Open Academic Journals Index.

Друкується за рішенням Вченої ради Поліського національного університету, протокол № 1 від 28.08.2021 р.

Підписано до друку 28.08.2021 р.
Формат 210×297. Ум. друк. арк. 11,4
Наклад 300 примірників

ISSN: 2663-2144
e-ISSN: 2709-8877

© Поліський національний університет, 2021

SCIENTIFIC HORIZONS



Founder, Editorial and Publisher
POLISSIA NATIONAL UNIVERSITY

Certificate of state registration
KV No. 24756-14696 PR of February 26, 2021.

The scientific journal is included in category B of the List of scientific professional periodicals of Ukraine. It enables publishing the thesis results for Doctor and Candidate degrees in economic agricultural, technical and veterinary sciences (Order of the Ministry of Education and Science of Ukraine No 1643 of December 28, 2019; Order of the Ministry of Education and Science of Ukraine No 409 of March 18, 2020). It comprises the following specialties – 071, 072, 073, 075, 076, 101, 133, 201, 202, 203, 204, 205, 206, 208, 211.

The journal is included in the international scientific databases and catalogs of scientific publications: Index Copernicus; Directory of Open Access Journals (DOAJ); Open Academic Journals Index (OAJI); Google Scholar; Crossref; National Library of Ukraine named after V. I. Vernadskiy, AGRICOLA, CAB Abstracts and Global Health (CABI), Open Academic Journals Index.

Recommended for publication by the decision of the Academic Council Polissia National University Minutes No. 1 of 28.08.2021.

ISSN: 2663-2144
e-ISSN: 2709-8877

Signed for publication 28.08.2021
Format 210×297. Mind. print. ark. 11.4.
Circulation 300 copies
© Polissia National University, 2021

НАУКОВИЙ ЖУРНАЛ
Засновано 12 березня 1998 р.
Періодичність випуску: чотири рази на рік

Редакційна колегія

Головний редактор

Олег Васильович Скидан ректор, д-р екон. наук, професор, Поліський національний університет, Україна

Заступник головного редактора

Л. Романчук д-р с.-г. наук, Поліський національний університет, Україна

Члени редакційної колегії

Ю. Раманаускас д-р наук, Клайпедський університет, Литва
Я.-У. Сандал ректор, професор, д-р філол. наук, Інститут Доктора Яна-У. Сандала, Норвегія
Е. Шараускіс професор, Інститут сільськогосподарської інженерії та безпеки університету Вітаутаса Магнуса (VMU), Литва
С. Збігнєв д-р наук, Природничий університет у Познані, Польща
Л. Бондарева канд. с.-г. наук, Національний університет біоресурсів і природокористування України, Україна
С. Веремеєнко д-р с.-г. наук, професор, Національний університет водного господарства та природокористування, Україна
В. Гамаюнова д-р с.-г. наук, Миколаївський національний аграрний університет, Україна
Л. Горальський д-р вет. наук, Поліський національний університет, Україна
І. Грабар д-р техн. наук, Поліський національний університет, Україна
В. Данкевич д-р екон. наук, Поліський національний університет, Україна
В. Журавльов д-р фіз.-мат. наук, Поліський національний університет, Україна
А. Зимароєва канд. біол. наук, Поліський національний університет, Україна
В. Зіновчук д-р екон. наук, Поліський національний університет, Україна
Т. Зінчук д-р екон. наук, Поліський національний університет, Україна
І. Іванова канд. с.-г. наук, Таврійський державний агротехнологічний університет ім. Д. Моторного, Україна
І. Іващенко канд. с.-г. наук, Поліський національний університет, Україна
Н. Колеснік канд. вет. наук, Поліський національний університет, Україна
Л. Котюк д-р біол. наук, Поліський національний університет, Україна
С. Кульман канд. техн. наук, Поліський національний університет, Україна
Н. Куровська канд. екон. наук, Поліський національний університет, Україна
С. Кухарець д-р техн. наук, Поліський національний університет, Україна
Н. Куцмус д-р екон. наук, Поліський національний університет, Україна
О. Марковська д-р с.-г. наук, Херсонський державний аграрно-економічний університет, Україна
О. Медведський канд. техн. наук, Поліський національний університет, Україна
А. Михайлов д-р екон. наук, Сумський національний аграрний університет, Україна
В. Мойсієнко д-р с.-г. наук, Поліський національний університет, Україна
К. Молодецька д-р техн. наук, Поліський національний університет, Україна
М. Плотнікова канд. екон. наук, Поліський національний університет, Україна

Н. Сорока	д-р вет. наук, Національний університет біоресурсів і природокористування України, Україна
Р. Ставецька	д-р с.-г. наук, Білоцерківський національний аграрний університет, Україна
Т. Тимошук	канд. с.-г. наук, Поліський національний університет, Україна
Т. Федонюк	д-р с.-г. наук, Поліський національний університет, Україна
Н. Цивенкова	канд. техн. наук, Поліський національний університет, Україна
Л. Чижевська	д-р екон. наук, Державний університет «Житомирська політехніка», Україна
О. Чайкін	канд. екон. наук, Поліський національний університет, Україна
П. Чумак	канд. с.-г. наук, Поліський національний університет, Україна
Л. Шірінян	д-р екон. наук, Національний університет харчових технологій, Україна
В. Шлапак	д-р с.-г. наук, Уманський національний університет садівництва, Україна
Я. Ярош	канд. техн. наук, Поліський національний університет, Україна
І. Левкович	д-р наук, Лейбніцький інститут розвитку сільського господарства у країнах з перехідною економікою, Німеччина

SCIENTIFIC HORIZONS

Vol. 24, No. 3 2021

SCIENTIFIC JOURNAL
Year of establishment: since March 1998.
Publication frequency: four times a year

Editorial Board

Editor-in-Chief

O. V. Skydan Rector, Full Doctor of Economic Sciences, Professor, Polissia National University, Ukraine

Deputy Editor-in-Chief

L. Romanchuk Full Doctor of Agricultural Sciences, Polissia National University, Ukraine

Editorial Board Members

J. Ramanauskas Dr. Habil., Klaipeda University, Lithuania
Ja.-U. Sandal Rector, Professor, Full Doctor of Philological Sciences, Jan-U. Sandal Institute, Norway
E. Sarauskis Professor, Institute of Agricultural Engineering and Safety of Vytautas Magnus university (VMU), Lithuania
S. Zbigniew Dr. Habil., Poznan University of Life Sciences, Poland
L. Bondareva PhD of Agricultural Sciences, National University of Life and Environmental Sciences of Ukraine, Ukraine
S. Veremeienko Full Doctor of Agricultural Sciences, Professor, National University of Water and Environmental Engineering, Ukraine
V. Hamaiunova Full Doctor of Agricultural Sciences, Mykolayiv National Agrarian University, Ukraine
L. Goralskiy Full Doctor of Veterinary Sciences, Polissia National University, Ukraine
I. Grabar Full Doctor of Engineering Sciences, Polissia National University, Ukraine
V. Dankevych Full Doctor of Economic Sciences, Polissia National University, Ukraine
V. Zhuravlov Full Doctor of Physical and Mathematical Sciences, Polissia National University, Ukraine
A. Zymarioieva PhD of Biological Sciences, Polissia National University, Ukraine
V. Zinovchuk Full Doctor of Economic Sciences, Polissia National University, Ukraine
T. Zinchuk Full Doctor of Economic Sciences, Polissia National University, Ukraine
I. Ivanova PhD of Agricultural Sciences, Dmytro Motornyi Tavria State Agrotechnological University, Ukraine
I. Ivashchenko PhD of Agricultural Sciences, Polissia National University, Ukraine
N. Kolesnik PhD of Veterinary Sciences, Polissia National University, Ukraine
L. Kotyuk Full Doctor of Biological Sciences, Polissia National University, Ukraine
S. Kulman PhD of Engineering Sciences, Polissia National University, Ukraine
N. Kurovska PhD of Economic Sciences, Polissia National University, Ukraine
S. Kukharets Full Doctor of Engineering Sciences, Polissia National University, Ukraine
N. Kutsmus Full Doctor of Economic Sciences, Polissia National University, Ukraine
O. Markovska Full Doctor of Agricultural Sciences, Kherson State Agrarian and Economic University
O. Medvedskiy PhD of Engineering Sciences, Polissia National University, Ukraine
A. Mykhailov Full Doctor of Economic Sciences, Sumy National Agrarian University, Ukraine
V. Moisiienko Full Doctor of Agricultural Sciences, Polissia National University, Ukraine
K. Molodetska Full Doctor of Agricultural Sciences, Polissia National University, Ukraine
M. Plotnikova PhD of Economic Sciences, Polissia National University, Ukraine

N. Soroka	Full Doctor of Veterinary Sciences, National University of Life and Environmental Sciences of Ukraine, Ukraine
R. Stavetska	Full Doctor of Agricultural Sciences, Bila Tserkva National Agrarian University, Ukraine
T. Tymoshchuk	PhD of Agricultural Sciences, Polissia National University, Ukraine
T. Fedoniuk	Full Doctor of Agricultural Sciences, Polissia National University, Ukraine
N. Tsyvenkova	PhD of Engineering Sciences, Polissia National University, Ukraine
L. Chyzhevskya	Full Doctor of Economic Sciences, Zhytomyr Polytechnic State University, Ukraine
O. Chaikin	PhD of Economic Sciences, Polissia National University, Ukraine
P. Chumak	PhD of Agricultural Sciences, Polissia National University, Ukraine
L. Shirinian	Full Doctor of Economic Sciences, National University of Food Technologies, Ukraine
V. Shlapak	Full Doctor of Agricultural Sciences, Uman National University of Horticulture, Ukraine
Y. Yarosh	PhD of Engineering Sciences, Polissia National University, Ukraine
I. Levkovich	Dr.Habil., Leibniz Institute of Agricultural Development in Transition Economies (IAMO), Germany

ЗМІСТ

С. М. Кульман, Л. М. Бойко, Я. С.

Прогнозування тривалої міцності деревних композитів з використанням кінетичних рівнянь..... 9

В. М. Яропуд

Аналітичні дослідження автоматичної вентиляційної системи забору забрудненого повітря свинарського приміщення ...19

О. А. Ткаченко, К. В. Аліфонова, О. Г. Гавриліна, А. Найт

Епізоотологічне значення рисового довгоносіка як резервуара *Mycobacterium bovis*.....28

А. К. Жумаділова, Е. Б. Мадалієва, С. З. Жигітова

Дослідження умов утворення фазових компонентів $K_2CaP_2O_7$, $KCaP_3O_9$, котрельного пилу та «молока»..... 38

Р. В. Яковенко

Загальний і фракційний склад води в листі груші залежно від оптимізованого удобрення45

О. П. Ткачук, В. І. Вергеліс

Інтенсивність забруднення ґрунту токсичними речовинами залежно від ступеня його змитості.....52

С. В. Ребко, І. В. Кімейчук, С. В. Сурав'єв, В. М. Хрик, С. М. Левандовська

Вплив нейтралізуючих матеріалів на реакцію середовища торф'яного субстрату при вирощуванні сіянців із закритою кореневою системою.....58

Л. М. Хорошков, Н. П. Дерев'янку

Проект благоустрою та озеленення приватної присадибної ділянки у місті Запоріжжя 68

ОГЛЯДОВІ СТАТТІ

Е. Б. Алієв, К. О. Лупко

Передумови створення мехатронної системи трієрних сепараторів насінневого матеріалу дрібнонасінневих культур.....75

З. В. Маслюкова, Г. О. Четверик, Е. Неоклеус, Ф. Отто

Отримання і використання компосту із органічної складової побутових відходів.....87

CONTENTS

S. Kulman, L. Boiko, Já. Sedliačik

Long-Term Strength Prediction of Wood Based Composites Using the Kinetic Equations..... 9

V. Yaropud

Analytical Study of the Automatic Ventilation System for the Intake of Polluted Air from the Pigsty19

O. Tkachenko, K. Alifonova, O. Gavrylina, A. Knight

Epizootological Significance of Rice Weevil as a *Mycobacterium Bovis* Reservoir28

A. K. Zhumadilova, E. B. Madaliyeva, S. Z. Zhigitova

Conditions for the Development of Phase Components $K_2CaP_2O_7$, $KCaP_3O_9$ in Toxic Dust38

R. Yakovenko

Total and Fractional Composition of Water in Pear Leaves Depending on the Optimised Fertiliser45

O. Tkachuk, V. Verhelis

Intensity of Soil Pollution by Toxic Substances Depending on the Degree of Its Washout52

S. Rabko, I. Kimeichuk, S. Surauyou, V. Khryk, S. Levandovska

The Effect of Neutralising Materials on the Reaction of the Peat Substrate Medium when Growing Ball-Rooted Seedlings58

L. Khoroshkov, N. Derevianko

Landscaping Project for a Private Garden Plot in the City of Zaporizhzhia.....68


REVIEW ARTICLES

E. Aliiev, K. Lupko

Prerequisites for the Creation of a Mechatronic System of Indented Cylinders for the Separation of Fine Seeds75

Z. Masliukova, H. Chetveryk, A. Neokleous, F. Otto

Obtaining and Use of Compost from the Organic Component of Household Waste.....87



UDC 636.4:636.083.3

DOI: 10.48077/scihor.24(3).2021.19-27

Analytical Study of the Automatic Ventilation System for the Intake of Polluted Air from the Pigsty

Vitalii Yaropud*

Vinnytsia National Agrarian University
21008, 3 Soniachna Str., Vinnytsia, Ukraine

Article's History:

Received: 15.05.2021

Revised: 20.06.2021

Accepted: 22.08.2021

Suggested Citation:

Yaropud, V. (2021). Analytical study of the automatic ventilation system for the intake of polluted air from the pigsty. *Scientific Horizons*, 24(3), 19-27.

Abstract. The microclimate of a pigsty is determined by the combination of temperature, relative humidity, chemical and mechanical composition of the air, which have a significant impact on animal productivity and must be maintained within strict limits due to the physiological needs and capabilities of animals. An appropriate ventilation system has been created to ensure the removal of air from the pigsty. The purpose of the study is to establish the dependence of the operating parameters of the automatic ventilation system on the air quality in the pigsty, taking into account the permissible concentrations of gases. The developed automatic ventilation system for polluted air intake is located in the middle of the livestock house under the ceiling and consists of a central air duct, to which air intake pipes are connected. Air intake pipes are placed in the middle above each pen where animals are kept. Intake dampers with servomechanisms, temperature, humidity, and air quality sensors are installed at the inlet of the air intake pipes. The outlet of the central air intake duct is connected to the exhaust fan. Intake dampers with servomechanisms and sensors of temperature, humidity, and air quality are connected to the control unit by electrical wires. As a result of analytical studies of the automatic ventilation system for polluted air intake from a pigsty, the conditions for its effective operation have been mathematically substantiated. The developed technique and the algorithm implemented based on the Mathematica software package allows calculating the area of holes that form intake dampers with servomechanisms in the air intake pipes. The distribution of velocities in the air intake pipes and the distribution diagram of the area of holes that form intake dampers with servomechanisms in the air intake pipes are determined taking into account the design and technological parameters of the ventilation system and the distribution of the gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) over the pens

Keywords: microclimate, pigsty, ventilation, automation, parameters, research, dependencies



Copyright © The Author(s). This is an open access article distributed under the terms of the Creative Commons Attribution License 4.0 (<https://creativecommons.org/licenses/by/4.0/>)

*Corresponding author

INTRODUCTION

The microclimate in a pigsty is determined by the combination of temperature, relative humidity, chemical and mechanical composition of the air. Each of these indicators individually has a significant impact on the animal productivity and must be maintained within strict limits due to the physiological needs and capabilities of animals. The microclimate is also affected by the technology of keeping animals, the density of their placement, the quantity and quality of bedding, the type of feeding, the species and age composition of livestock. In other words, a microclimate is a meteorological regime of closed rooms for animals, the concept of which includes temperature, humidity, chemical composition and speed of air movement, dustiness, and illumination. The optimal microclimate helps to increase animal productivity, reduce feed costs for obtaining a unit of production, which has a positive effect on the health of farm animals. The state of the microclimate depends on climatic and weather conditions, the type of pen and its enclosing structures, the level of air exchange, the perfection of the systems of ventilation, heating, sewerage, and manure harvesting [1].

A significant number of research papers are devoted to the study of the influence of microclimate on the productive qualities of pigs [2-4]. M. Kalinin [5], V. F. Lipatnikov and V. P. Stepanov [6] note that the conditions of keeping pigs during rearing significantly affect their productivity. At the same time, a significant number of researchers point out the dependence of microclimate parameters on the technical devices used to provide it [7].

In industrial animal husbandry, the creation of an optimal microclimate depends on many factors and is carried out through a number of compromises. Nowadays, there are data based on which it is possible to accurately determine those environmental factors necessary for the manifestation of genetically determined abilities of animals. However, providing a thermoneutral zone is associated with large capital investments, high energy prices, and recently requires increasing operating costs. As long as there are no significant changes in pricing, instead of forming a thermoneutral zone, it is advisable to create an optimal productive environment, which is a compromise between high production costs and the quality of livestock products. Given that the size of capital investment and operating costs can change significantly in a short time, the microclimatic conditions characteristic of an optimal productive environment also cannot remain unchanged, even taking into account the fact that the requirements of animals for their environment practically do not change for a long time [8].

Modern climate control systems in pig breeding premises include: climate control computers, temperature,

humidity and gas sensors, fans, humidifiers. The heart of the microclimate control system is a computer that controls all mechanisms. The computer continuously controls the fans, changing their performance from 0 to 100%, while providing greater resistance of ventilation to changes in atmospheric pressure and less sensitivity to winds. This allows ensuring an optimal indoor microclimate and is cost-effective. At the same time, non-automatic exhaust devices (roof shafts of various configurations; shafts that draw air from manure channels) and supply devices (roof shafts, wall and ceiling vents-valves, windows [9] are also used.

The sex and age of pigs and the configuration of the pig breeding room affect the need to use a particular type of heating. The heating system is selected taking into account the availability of certain energy resources at the farm enterprise. The use of electricity and direct fuel combustion equipment is considered the most common in modern pig breeding complexes. The most economical is the use of blower heat generators. Taking into account the technological features, such systems can be used in pens for keeping boars, mating-gestating sows, and fattening pigs. Due to the generation of intense air flow, they cannot be used in nurseries and rearing pens. To provide heating of rearing pens, a ribbed general heating pipe, water heating registers such as delta tubes and water mats are most often used. In turn, infrared emitters are successfully used in nurseries. Their energy source is electricity or natural gas [10].

The purpose of the study is to establish the dependence of the operating parameters of the automatic ventilation system for the polluted air intake on the air quality in the pigsty, taking into account the permissible gas concentrations.

MATERIALS AND METHODS

Analytical studies of the automatic ventilation system for the intake of polluted air from a pigsty are carried out based on mathematical modelling of the process using the main provisions of aerodynamics and numerical calculation methods.

The Mathematica computer mathematics system was used to simplify the obtained expressions and mathematical modelling. The following provisions were adopted to develop a mathematical model of the operation of the ventilation system for polluted air intake:

- in each section of the air flow through the air ducts, part of the total pressure used to overcome the forces of pneumatic resistances is lost due to the molecular and turbulent viscosity of the moving air, the mechanical work of the resistance forces is converted into heat;
- there are two types of pneumatic resistance in an air duct: friction resistance and local resistance;
- pneumatic friction is caused by the air viscosity (both molecular and turbulent) that occurs during its

movement, and is the result of the exchange of the amount of motion between molecules (in laminar motion), and between individual particles (in turbulent motion) of neighbouring air layers moving at different speeds;

– local resistances occur when a local violation of the normal flow, separation of the flow from the walls, vortex generation, and intense turbulent mixing of the flow in places where the configuration of the air duct changes or when obstacles meet and flow around. These phenomena increase the exchange of motion between

moving air particles (i.e., friction), increasing energy dissipation.

The main parameters of the microclimate of pig breeding premises are regulated by the norms of technological design [11]. According to the recommendations of well-known animal technicians and veterinarians [12; 13] and the existing requirements of VNTP-APK-02.05 “Pig breeding enterprises (complexes, farms, small farms)”, the technological parameters of the microclimate of premises for keeping pigs can be summarised in Table 1.

Table 1. Technological parameters of the microclimate of premises for keeping pigs

Parameter	Newborn piglets	Piglets up to 8 kg	Growing	Fattening	Closed gilts	Suckling gilts
Air temperature, °C						
Maximum	33	30	20	20	18	22
Minimum	30	24	15	12	13	18
Relative humidity, %						
Maximum	60	70	70	70	70	70
Minimum	55	40	40	40	40	40
Maximum permissible air velocity, m/s						
At the minimum temperature	0.15	0.2	0.2	0.3	0.3	0.15
At maximum temperature	0.4	0.5	0.5	1	1	0.4
Permissible concentrations of gases and dust in the air						
Carbon dioxide (long-term), %	0.2					
Carbon dioxide (short-term), %	0.35					
Ammonia (long-term), mg/m ³	20					
Ammonia (short-term), mg/m ³	30					
Hydrogen sulphide, (long-term), mg/m ³	10					
Hydrogen sulphide, (short-term), mg/m ³	15					

Naturally, such microclimate parameters at ruling energy prices require high costs, but these are the most favourable conditions for the life of suckling piglets.

RESULTS AND DISCUSSION

To ensure the removal of air from the pigsty, an appropriate ventilation system has been created (Fig. 1). To substantiate the design and technological parameters of ventilation system automation, it is necessary to perform analytical studies.

Automatic ventilation system for polluted air intake (Fig. 1) is located in the middle of the livestock room under the ceiling and consists of a central air duct for air intake (1), to which the air intake pipes (2) are connected. Air intake pipes (2) are located in the middle above each pen where animals are kept. Intake dampers with servomechanisms (3) and temperature, humidity, and air quality sensors (4) are installed at the

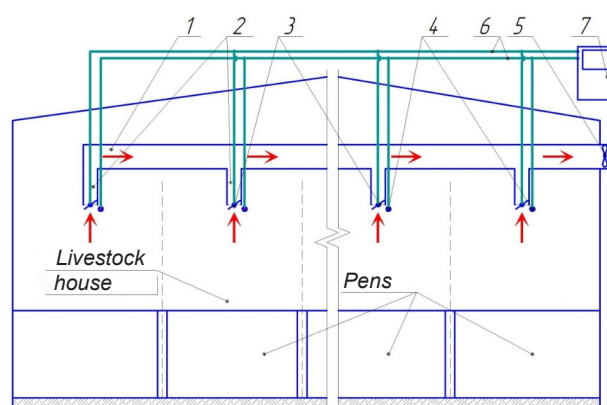


Figure 1. Technological scheme of automatic ventilation system for polluted air intake: 1 – central air duct; 2 – branch pipes; 3 – intake dampers with servomechanisms; 4 – temperature, humidity, and air quality sensors; 5 – exhaust fan; 6 – electrical wires; 7 – control unit

inlet of the air intake pipes (2). The outlet of the central air duct for air intake (1) is connected to the exhaust fan (5). Intake dampers with servomechanisms (3) and temperature, humidity, and air quality sensors (4) are connected to the control unit (7) by means of electrical wires (6).

The automatic ventilation system for polluted air intake works as follows: depending on the air quality above the pens, which is determined using temperature, humidity, and air quality sensors (4) and the limit values set by the operator, the control unit (7) transmits a signal to the intake dampers with servomechanisms (3) by electrical wires (6). If the measured air quality values are less than the limit values set by the operator, the intake flap with servo drive (3) is closed. Otherwise, the

intake flap with servo drive (3) opens at an angle that is directly proportional to the corresponding difference between the air quality values and the limit values. Under the action of exhaust fan (5), air is sucked into the air intake pipes (2) and is formed into a stream that moves through the central air intake duct (1) of the polluted air intake system. Then the air flow is removed from the room.

Due to the fact that certain group pens may contain different numbers of animals grouped by age, the gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) located above the pens may differ (Fig. 2) [14-16]. Therefore, the automatic ventilation system for polluted air intake must adjust the air flow rate for each pen individually.

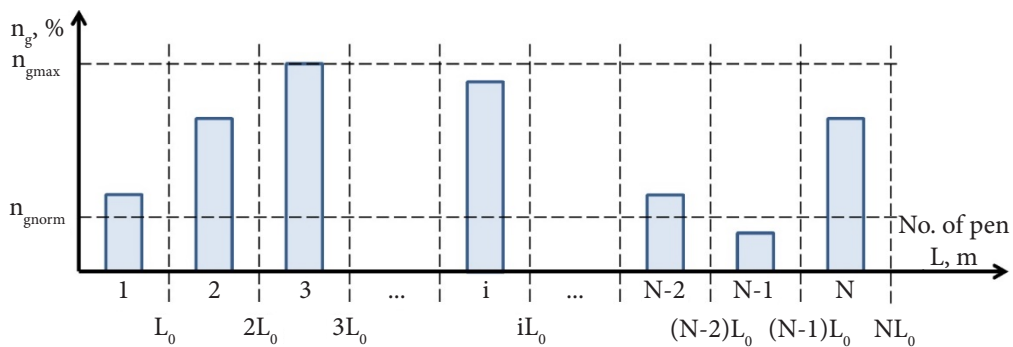


Figure 2. Distribution of gas concentrations (carbon dioxide, ammonia, and hydrogen sulphide) n_g above the pens: n_g – gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) above the pens, %; $n_{g\text{norm}}$ – limit values of gas concentration in the pigsty, %; $n_{g\text{max}}$ – maximum value value of gas concentration above the pen, %; i – pen number; N – total number of pens; L_0 – width of the pen (provided that the geometric dimensions of all pens are the same), m

The operation of an automatic ventilation system for polluted air intake can be mathematically represented as follows:

$$n_{gi} \leq n_{g\text{norm}} \Rightarrow q_i = q_0 \quad (1)$$

$$n_{gi} = n_{g\text{max}} \Rightarrow q_i = q_{\text{max}} = q_0 + \Delta q_{\text{max}}$$

where $q_i = q_0 + \Delta q_i$ – volumetric air flow rates through i -th air intake pipe, m^3/s ; q_0 – volumetric air flow rate through the air intake pipe when the servo-operated intake flap is completely closed, m^3/s ; Δq_i – volumetric air flow rate through the open i -th intake flap with servo drive at a certain angle, m^3/s ; q_{max} – volumetric air flow rate through the air intake pipe when the servo-operated intake flap is fully open, m^3/s ; Δq_{max} – volumetric air flow rate through a fully open i -th intake flap with servo drive, m^3/s .

The values of air flow through the open i -th intake flap with a servo drive must be directly proportional to the gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) over i -th pen:

$$\Delta q_i = k(n_{gi} - n_{g\text{norm}}) \quad (2)$$

$$\Delta q_{\text{max}} = k(n_{g\text{max}} - n_{g\text{norm}}) \quad (3)$$

where k – proportionality coefficient, $m^3/(c\cdot\%)$.

Combining equations (1)-(3), the dependence of air flow through the open i -th intake flap with servo drive from the gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) over i -th pen is obtained:

$$q_i = \begin{cases} q_0 + \frac{\Delta q_{\text{max}}}{n_{g\text{max}} - n_{g\text{norm}}}(n_{gi} - n_{g\text{norm}}), n_{gi} > n_{g\text{norm}}, \\ q_0, n_{gi} \leq n_{g\text{norm}} \end{cases} \quad (4)$$

In turn, the volume flow rate of air through the open i -th air intake flap with servo drive at a certain angle directly proportional to the area of the opening σ_i , and air velocity V_i :

$$q_i = q_0 + \sigma_i V_i \quad (5)$$

Expressing from (5) σ_i and substituting in (4):

$$\sigma_i = \begin{cases} \frac{1}{V_i} \frac{\Delta q_{\text{max}}}{n_{g\text{max}} - n_{g\text{norm}}}(n_{gi} - n_{g\text{norm}}), n_{gi} > n_{g\text{norm}}, \\ 0, n_{gi} \leq n_{g\text{norm}} \end{cases} \quad (6)$$

In accordance with previous studies [17-18], it was found that under the condition of uniform placement of air intake pipes and their identical diameter,

the velocity field is deformed, which consists of air velocities from each hole V_i .

The deformation of the velocity field consists in the fact that the air velocity field has a skewed profile: from the axis of the central air duct for air intake in the direction of the opening, an increase in speed is observed, and in the opposite direction (a wall without a hole) – a decrease. The static air pressure changes in the cross-section in the opposite order: it is the smallest in the hole and continuously increases in the direction opposite to the wall of the hole. When moving from one cross-section to another, the average air velocity, dynamic average and average pressure change.

In the direction from the beginning to the end of the central air intake duct (opposite to the air flow), the average speed decreases. Thus, the dynamic pressure will decrease in such a direction that it is opposite to the direction of air flow by a certain amount, which, according to the law of conservation of energy, will turn into static pressure. This value of dynamic pressure is called "released dynamic pressure". Due to the released dynamic pressure, the static air pressure inside the central

air intake duct increases in the opposite direction of the flow. However, it will be spent in the same direction on overcoming friction and local resistance. If the released dynamic pressure is greater than the pressure losses on friction and local resistances, then the static pressure will eventually increase, and if it is less than these pressure losses, then the static pressure will decrease. If the released dynamic pressure is equal to the pressure loss, then the static air pressure inside the central air intake duct will remain unchanged. Thus, the nature of the change in static air pressure inside the central air intake duct depends entirely on the ratio of released dynamic pressure and pressure losses. Taking into account the above, equation (6) needs to be clarified taking into account the non-uniformity of the air flow velocity distribution, which occurs due to pressure losses.

Central air duct for air intake of constant cross-section length L (Fig. 3) has a perimeter R and cross-sectional area F . Along the air duct in its side surface, N air intake pipes is evenly distributed. The area of the openings of the air intake pipes is different. The air flow rate at the end of the duct is equal to w_k .

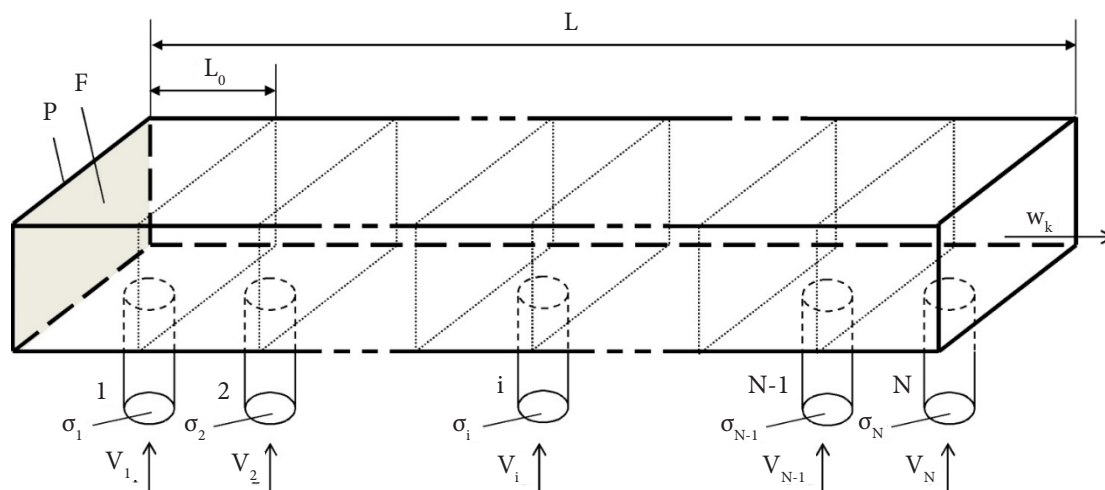


Figure 3. Design scheme of the central air duct for air intake

It is necessary to determine how the areas of the openings of the air intake pipes should change along the length of the central air duct to ensure that air is sucked into the openings in accordance with the equation (4). It is necessary to number all the holes in the direction of the air flow and draw cross-sections 1-1, 2-2, ..., $i-i$, $(N-1)-(N-1)$, $N-N$ after each hole.

Air intake rate in i -th air intake pipe opening:

$$V_i = \mu \sqrt{\frac{2}{\rho} (p_a - p_i)} \quad (7)$$

where ρ – air density, kg/m^3 ; p_i – pressure in i -th opening of the air intake pipe, Pa; p_a – atmospheric pressure, $p_a = 101,325$ Pa; μ – coefficient of friction of the hole, $\mu = 0.65$ [19].

Since the volume is limited by i -th and $i-1$ -th

sections and walls of the central air duct for air intake, the equation of the amount of motion in projections on the axis of the air duct has the form:

$$p_{i-1}F - p_iF - \tau_{i-1}PL_0 = \frac{\rho F w_i^2}{2} - \frac{\rho F w_{i-1}^2}{2} \quad (8)$$

$$\tau_{i-1} = \frac{\lambda \rho w_{i-1}^2}{4} \quad (9)$$

where L_0 – distance between the axes of two adjacent holes, m; λ – coefficient of friction resistance, $\lambda = 0.01717$ [20]; w_i – air velocity through i -th cross-section, m/s.

Substituting equation (9) into (8) and dividing all terms of the equation by F , obtain:

$$p_{i-1} - p_i - \frac{\lambda \rho P L_0 w_{i-1}^2}{8F} = \frac{\rho w_i^2}{2} - \frac{\rho w_{i-1}^2}{2} \quad (10)$$

With uniform air distribution:

$$w_i = w_k \frac{i}{N}, w_{i-1} = w_k \frac{i-1}{N}, \Delta q \frac{q_k}{N_{max}} \quad (11)$$

Substituting in the last equation w_i and w_{i-1} :

$$p_{i-1} = p_i + \frac{\rho w_k^2}{2} \frac{1}{N^2} \left[\left(\frac{\lambda P L_0}{4F} - 1 \right) (i-1)^2 + i^2 \right] \quad (12)$$

According to equation (8) for the end of the central air intake duct:

$$p_N = \frac{\rho w_k^2}{2} \quad (13)$$

The air flow rate at the end of the central air intake duct is determined by the equation (14):

$$V_{i-1} = \mu \sqrt{\frac{2}{\rho} \left(p_a - p_i - \frac{\rho q_k^2}{2F^2} \frac{1}{N^2} \left[\left(\frac{\lambda P L_0}{4F} - 1 \right) (i-1)^2 + i^2 \right] \right)} \quad (18)$$

Substituting (18) into (6), an equation is finally obtained for calculating the area of the opening formed

$$\sigma_i = \begin{cases} \frac{\frac{\Delta q_{max}}{n_{gmax} - n_{gnorm}} (n_{gi} - n_{gnorm})}{\mu \sqrt{\frac{2}{\rho} \left(p_a - p_i - \frac{\rho q_k^2}{2F^2} \frac{1}{N^2} \left[\left(\frac{\lambda P L_0}{4F} - 1 \right) (i-1)^2 + i^2 \right] \right)}} & n_{gi} > n_{gnorm} \\ 0, & n_{gi} \leq n_{gnorm} \end{cases} \quad (19)$$

The methodology developed above and the algorithm implemented on its basis are executed in the Mathematica software package.

Taking the structural and technological parameters of the ventilation system for polluted air intake ($L=42$ m; $P=1.25$ m; $\rho=1.27$ kg/m³; $q_k=1.5$ m³/s; $F=0.126$ m²;

$$q_k = w_k F \quad (14)$$

from here:

$$w_k = \frac{q_k}{F} \quad (15)$$

The dependence of (12) and (13), taking into account (15), takes the form:

$$p_{i-1} = p_i + \frac{\rho q_k^2}{2F^2} \frac{1}{N^2} \left[\left(\frac{\lambda P L_0}{4F} - 1 \right) (i-1)^2 + i^2 \right] \quad (16)$$

$$p_N = \frac{\rho q_k^2}{2F^2} \quad (17)$$

Substituting the pressure value according to equation (16) into (7):

by the intake flap with a servo drive in the air intake pipe:

$\mu=0,025$; $p_a=101325$ Pa; $\lambda=0.01717$; $n_{gnorm}=10\%$) and distribution of gas concentrations (carbon dioxide, ammonia, and hydrogen sulphide) n_g above the pens (Fig. 4) the speed distribution in the air intake pipes is determined (Fig. 5).

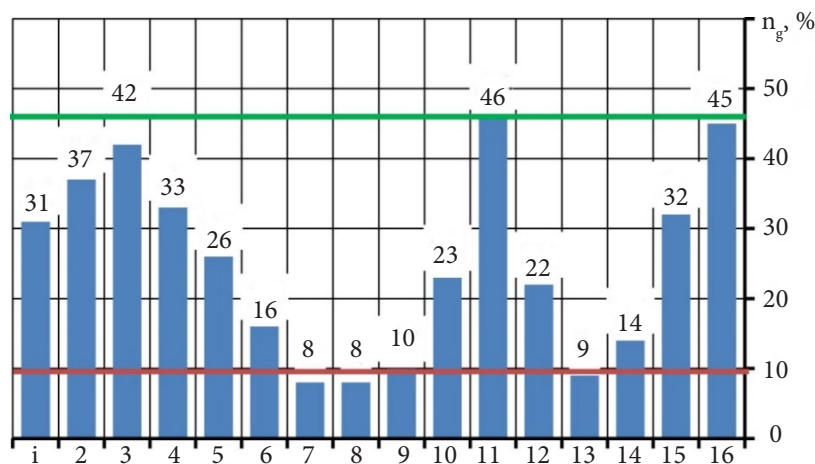


Figure 4. Distribution of gas concentration n_g above the pens

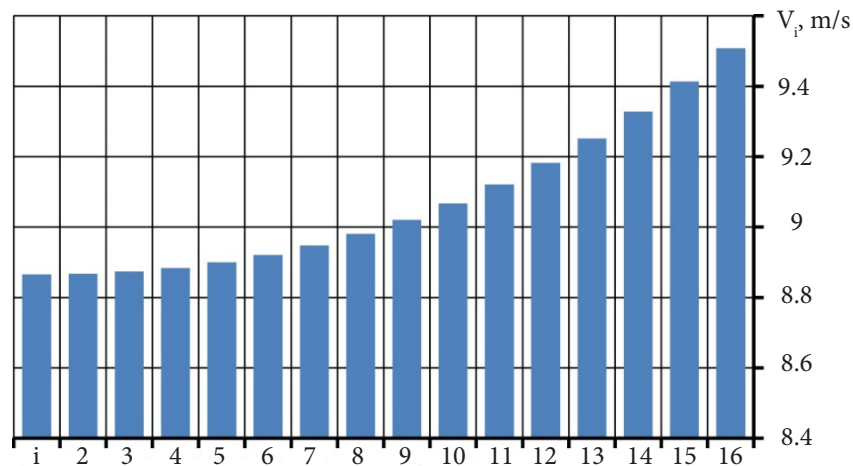


Figure 5. Velocity distribution V_i in the air intake pipes

Analysing Figure 5, it can be argued that the speed in the air intake pipes gradually decreases from 9.5 m/s to 8.8 m/s in the direction opposite to the air flow. Given the resulting velocity distribution V_i in the air intake pipes (Fig. 5) and the gas concentration distribution is accepted ng above the pens (Fig. 4) taking into account

equation (19), a diagram of the distribution of the area of holes formed by intake dampers with servomechanisms in the air intake pipes is obtained (Fig. 6). For comparison, Figure 6 shows a diagram of the hole area distribution without taking into account the velocity distribution V_i in the air intake pipes.

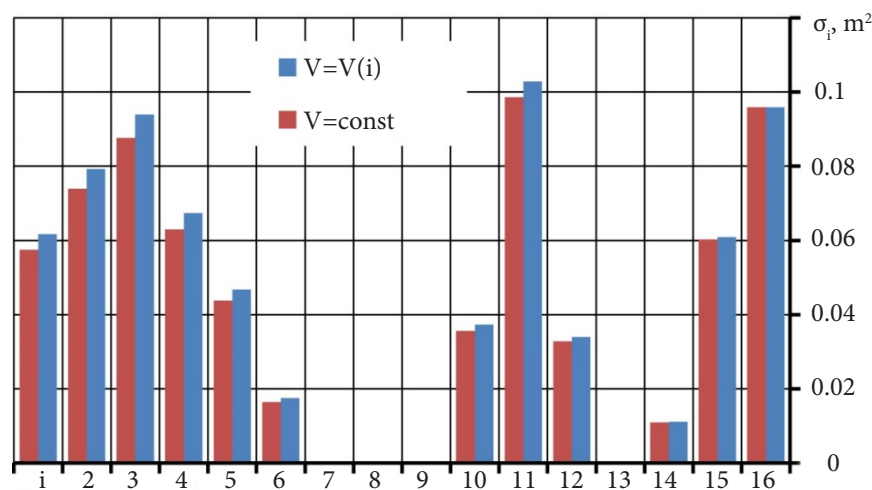


Figure 6. Velocity distribution V_i in the air intake pipes

Analysis of Figure 6 shows that given the velocity distribution $V=V_i$ of the control unit of the automatic ventilation system for polluted air intake, it is possible to more accurately adjust the intake dampers with servomechanisms. This allows fulfilling the specified condition (4).

CONCLUSIONS

An increase in pig productivity can be achieved in various ways. The most effective of them is to create a favourable microclimate in the pens where pigs are kept. A favourable microclimate is achieved in various ways, but the simplest is the arrangement of professional ventilation. Proper design of livestock facilities and equipment with ventilation systems prevents cases of dangerous viruses and, as a result, improves the quality and safety of pork.

As a result of analytical studies of the automatic ventilation system for polluted air intake from a pigsty, the conditions for its effective operation have been mathematically substantiated. The developed technique and the algorithm implemented based on the Mathematica software package allows calculating the area of holes that form intake dampers with servomechanisms in the air intake pipes.

Taking the structural and technological parameters of the ventilation system for polluted air intake ($L, P, \rho, q_k, F, \mu; p_a, \lambda; n_{gnorm}$) and distribution of gas concentrations (carbon dioxide, ammonia, and hydrogen sulphide) n_g the speed distribution in the air intake pipes above the pens V_i is determined and a diagram of the hole area distribution σ_p , which form intake dampers with servomechanisms in the air intake pipes.

Taking into account the speed distribution $V=V_i$

of the control unit of the automatic ventilation system for polluted air intake, it is possible to more accurately adjust the intake dampers with servomechanisms. This allows fulfilling the set condition for the dependence of

air flow through the open i -th air intake flap with servo drive depending on the gas concentration (carbon dioxide, ammonia, and hydrogen sulphide) over i -th pen.

REFERENCES

- [1] Samokhina, Ye.A., Povod, M.G., & Mylostyvyi, R.V. (2018). Microclimate parameters in the pig breeding areas in summer for different ventilation systems and their impact on productivity of lactating sows and growth of suckling piglet. *Bulletin of Sumy National Agrarian University. The series: Livestock*, 2(34), 218-223.
- [2] Bugajevskij, V.M., Ostapenko, O.M., & Danylchuk, M.I. (2010). Impact of environment and retention technology on pig productivity. *Scientific Works of Moscow State University*, 132(119), 59-61.
- [3] Voloshchuk, V.M., Povod, M.G., & Vasylyv, A.P. (2013). Productive and adaptive qualities of piglets on growing depending on genotype and conditions of keeping. *Pig Production*, 62, 3-8.
- [4] Vysokos, M., Milostiviy, R., Pugach, A., & Typina, N. (2016). Measures to stabilize the microclimate in livestock buildings by moistening and cooling in hot weather. *Theoretical and Applied Veterinary Medicine*, 4(3), 69-73.
- [5] Kalinin, M. (2017). Optimal microclimate with minimal energy cost. *Pig Breeding*, 3, 30-32.
- [6] Lipatnikov, V.F., & Stepanov, V.P. (2004). Improvement of the methods of keeping different production groups of pigs. *Collection of Scientific Works VNIITIMZH*, 14, 151-167.
- [7] Demchuk, M.V., & Reshetnik, A.O. (2006). Microclimate and efficiency of ventilation system in reconstructed premises for pigs in different periods of the year. *Scientific Messenger of Lviv National University of Veterinary Medicine and Biotechnologies. Series: Veterinary Sciences*, 8(1(28)), 36-42.
- [8] Vodyannikov, V.P. (200). Ways to improve the reproductive function of sows. *Pig Breeding*, 1, 6-8.
- [9] Severnev, M.M., & Sheiko, I.P. (2005). *State program of rural revival and development for 2005-2010*. Minsk: Belarus.
- [10] Klinsky, Yu.D., Zhidkov, G.F., & Grigorenko, V.A. (2000). Increase of fertility of pigs in the summer. *Animal Husbandry*, 12, 15-17.
- [11] Dudin, V.Yu., Romanyukha, I.O., Kiryatsev, L.O., Havrylchenko, O.S., & Povod, M.H. (2013). Improving the process of designing pig farms in modern conditions. *Bulletin of Dnipropetrovsk State Agrarian University*, 2(32), 72-75.
- [12] Mykhalko, O.H., & Povod, M.H. (2020). The Sows productivity and annual dynamics of piglet growth depending on the design features of the microclimate system. *Animal Husbandry Products Production and Processing*, 1(156), 84-95. doi: 10.33245/2310-9270-2020-157-1-84-95.
- [13] Navrátil, S., Forejtek, P., Drybcák, J., & Pavlica, J. (1981). Relations of certain indicators of ejaculate quality of breeding boars to seasonal changes in the microclimate in pigsties. *Veterinární Medicína*, 26(2), 75-83.
- [14] Aliyev, E.B., Havrylchenko, O.S., & Klyus, A.V. (2019). Substantiation of the composition of energy-saving technical means to ensure the microclimate in livestock facilities. *Modern problems and technologies of the agricultural sector of Ukraine: Coll. scientific works* (November 21, 2019), 8-16.
- [15] Aliyev, E.B., & Bilous, I.M. (2020). Substantiation of the composition of energy-saving technical means to ensure the microclimate in livestock facilities. *Proceedings of the XVI International Scientific and Practical Conference "Latest Scientific Achievements – 2020"*, 3, 36-38.
- [16] Aliyev, E.B., Yaropud, V.M., & Bilous, I.M. (2020). Justification of the composition of the energy saving system of microclimate support in pig farms. *Vibration in Engineering and Technology*, 2(97), 129-137. doi: 10.37128/2306-8744-2020-2-14.
- [17] Pryshlyak, V.M., Yaropud, V.M., Kovyazin, O.S., & Aliyev, E.B. (2014). Substantiation of geometrical parameters of location of openings in the air duct of a three-pipe concentric heat recovery unit. *Industrial Hydraulics and Pneumatics*, 4(46), 83-87.
- [18] Yaropud, V.M., & Aliyev, E.B. (2015). Methods of engineering calculation of heat recovery parameters for livestock premises. *Scientific Bulletin of the National University of Life and Environmental Sciences of Ukraine. Series: Engineering and Energy of Agro-Industrial Complex*, 212/2, 214-221.
- [19] Khrustalev, B.M. (2008). *Heat supply and ventilation. Course and diploma design*. Moscow: ASV.
- [20] Kostryukov, V.A. (1962). *Collection of examples of calculation for heating and ventilation. Ventilation*. Moscow: Hosstroyzdat.

Аналітичні дослідження автоматичної вентиляційної системи забору забрудненого повітря свинарського приміщення

Віталій Миколайович Яропуд

Вінницький національний аграрний університет
21008, вул. Сонячна, 3, м. Вінниця, Україна

Анотація. Мікроклімат свинарського приміщення визначається сукупністю температури, відносної вологості, хімічного та механічного складу повітря, які мають суттєвий вплив на продуктивність тварин і мають підтримуватися в суворих рамках, обумовлених фізіологічними потребами і можливостями тварин. У рамках зазначеного для забезпечення відведення повітря з приміщення свинарника створена відповідна вентиляційна система. Метою досліджень є встановлення залежності режимних параметрів автоматичної вентиляційної системи забору забрудненого повітря від якості повітря у свинарнику з урахуванням допустимих концентрацій газів. Розроблена автоматична вентиляційна система забору забрудненого повітря розміщена в середині тваринницького приміщення під стелею і складається з центрального повітропроводу для забору повітря, до якого приєднанні патрубки для забору повітря. Патрубки для забору повітря розміщені посередині над кожним станком, де утримуються тварини. На вході патрубків для забору повітря встановлені забірні заслінки із сервоприводами і датчики температури, вологості та якості повітря. Вихід центрального повітропроводу для забору повітря приєднано до витяжного вентилятора. Забірні заслінки із сервоприводами і датчики температури, вологості та якості повітря по засобах електричних проводів 6 приєднані до блока керування. У результаті аналітичних досліджень автоматичної вентиляційної системи забору забрудненого повітря свинарника математично представлено умову її ефективної роботи. Розроблена методика і реалізований на основі неї алгоритм у програмному пакеті Mathematica дозволяє розраховувати площі отворів, які утворюють забірні заслінки із сервоприводами у патрубках для забору повітря. Приймаючи конструкційно-технологічні параметри вентиляційної системи забору забрудненого повітря і розподіл концентрації газів (вуглекислого газу, аміаку і сірководню) над станками визначено розподіл швидкостей у патрубках для забору повітря і діаграму розподілу площі отворів, які утворюють забірні заслінки із сервоприводами у патрубках для забору повітря

Ключові слова: мікроклімат, свинарник, вентиляція, автоматизація, параметри, дослідження, залежності

**Journal
"SCIENTIFIC HORIZONS"**

**Volume 24, No. 3
2021**

Editing English-language texts:

S. Vorovsky, A. Kravchenko

Literary editor:

S. Pastukh

Editing bibliographic lists:

S. Pastukh, K. Sosiedko

Desktop publishing:

K. Sosiedko

Signed to the print with the original layout 28.08.2021.

Mind. print. ark. 11.4

Publisher: Polissia National University
10008, 7 Staryi Blvd., Zhytomyr, Polissia National University, Ukraine.
Tel. (0412) 22-04-17;
E-mail: info@sciencehorizon.com.ua
www: <https://sciencehorizon.com.ua/en>